
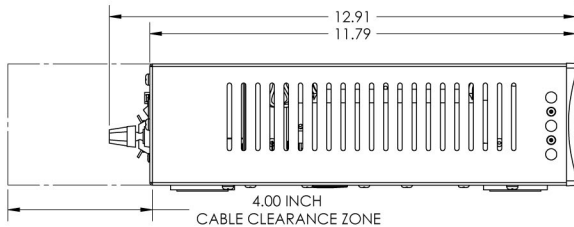


SC-600 Amplifier SubContractor™ Series

"CUT, PLUG AND PLAY" CUSTOM INSTALLATION SUBWOOFERS

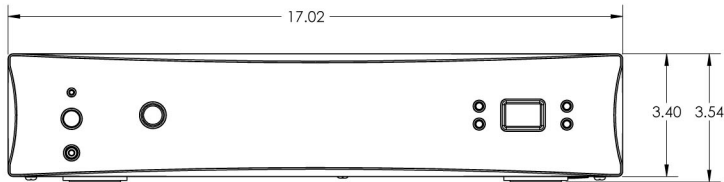

Features

- Superior headroom for dynamic bass with impact and authority
- Exclusive Velodyne distortion-limiting circuitry prevents audible distortion
- System friendly: 12-volt trigger, IR repeater jack, RS-232 Controllable (Crestron Certified)
- Twin systems can be run via rear-panel pass through to a second SC-600 amp (a single SC-600 amp running two subs is not possible)
- Easy connection to the subwoofer with conventional speaker wire
- Very reliable, with a strong warranty - three years parts and labor

S P E C I F I C A T I O N S

Model	SC-600 Amplifier
Amplifier Class A/B	400 watts Dynamic 200 watts RMS Power
High Pass Crossover	80 Hz (6 dB/octave)
Low Pass Crossover	30-160 Hz, Defeatable, 24 dB/octave slope
Inputs	Line and Speaker Level
Outputs	Line level, 80 Hz up, speaker level
Phase	0°, 90°, 180°, 270°
Dimensions (H/W/D) (Inc. feet & knobs)	3.6" x 17" x 13" (9 x 43.2 x 33 cm) ** Allow two extra inches in depth for wire connectors and power cable. ** Includes feet. Feet can be removed for rack mount use. Unit is approximately "two rack units" high.
Warranty (parts/labor) (North America)	Three years (electronics) Five years (drivers)
Shipping Weight (approx.)	25 lbs. (22.7 kg)